

PRODUCT SPECIFICATION SHEET

SMALL HAP HANGERS

1/2" HAP Hanger


Model Number: PL-1111-1/2

3/4" HAP Hanger

Model Number: PL-1111-3/4


1" HAP Hanger

Model Number: PL-1111-1

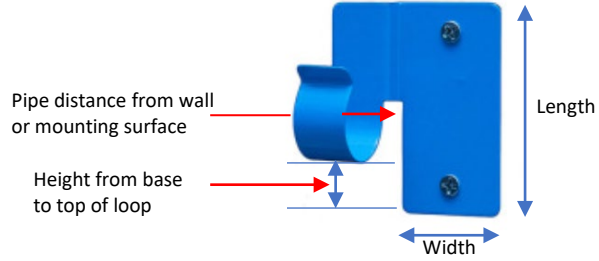

Inside Wall Installation

Mark Drilling Center Point 3/4" from edge



Model PL-1111-1/2

Model PL-1111-3/4

Model PL-1111-1

| | |
|--------------------------|---|
| Fits | 1/2" CPVC, PEX and Copper Pipe |
| Pipe distance from wall | 1/2" |
| Material | 18G Spring Steel |
| Max Load | 30 LBS |
| Length | 2-3/4" |
| Width | 2-1/4" |
| Height | 1-1/4" |
| Metal Detection | Yes |
| Finish | Powder Coated |
| Inside wall Installation | Mark the hole center point 3/4" from edge of wood or metal stud |
| Outside wall | HAP Hanger can be mounted on any surface |

| | |
|--------------------------|---|
| Fits | 1/2" PVC Pipe |
| | 3/4" CPVC, PEX and Copper Pipe |
| Pipe distance from wall | 3/8" |
| Material | 18G Spring Steel |
| Max Load | 30 LBS |
| Length | 2-3/4" |
| Width | 2-1/4" |
| Height | 1-1/4" |
| Metal Detection | Yes |
| Finish | Powder Coated |
| Inside wall Installation | Mark the hole center point 3/4" from edge of wood or metal stud |
| Outside wall | HAP Hanger can be mounted on any surface |

| | |
|--------------------------|---|
| Fits | 3/4" PVC Pipe |
| | 1" CPVC, PEX and Copper Pipe |
| Pipe distance from wall | 1/4" |
| Material | 18G Spring Steel |
| Max Load | 30 LBS |
| Length | 2-3/4" |
| Width | 2-1/4" |
| Height | 1-3/8" |
| Metal Detection | Yes |
| Finish | Powder Coated |
| Inside wall Installation | Mark the hole center point 3/4" from edge of wood or metal stud |
| Outside wall | HAP Hanger can be mounted on any surface |

- Combines the pipe hanger and stud guard protection in one product.
- Durable powder coated finish for indoor or outdoor applications.
- Compatible with all types of pipe material.
- All HAP Hangers are concentric. For jobs that require pipe size reduction, pipes are always on center.
- Tempered spring steel allows pipes to easily snap into the bracket during installation.
- Round edges for safe installation. No sharp edges.
- cUPC – IAPMO Listed



| Product Submittal | |
|--------------------|----------|
| Date: | |
| Job Name: | |
| Model Number | Quantity |
| | |
| | |
| Architect / Owner: | |
| Contractor: | |
| | |
| Notes | |